

Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted.

<u>Part</u>	<u>Cost</u>	<u>Quantity</u>	<u>Total Cost</u>
Crotch Strap/Buckle	\$4.99	X _____	\$ _____
Harness Strap\$2.00	X _____	\$ _____
Seat Pad\$24.99	X _____	\$ _____
Chest Clip\$1.50	X _____	\$ _____
Cup Holder\$4.99	X _____	\$ _____
Locking Clip\$2.50	X _____	\$ _____
Tether Kit\$9.99	X _____	\$ _____
UAS Kit\$24.99	X _____	\$ _____
Instructions\$0.00	X _____	\$ _____

Merchandise Total \$ _____

Shipping and handling: \$ _____

Up to \$25.00	\$5.95	\$100.01 to \$150.00	\$10.95
\$25.01 to \$50.00	\$6.95	\$150.01 to \$200.00	\$11.95
\$50.01 to \$75.00	\$8.95	\$200.01 and up	\$13.95
\$75.01 to \$100.00	\$9.95	Outside USA and Canada	\$10.00

Sales Tax \$ _____

Residents of Quebec, add 7% GST and 7.5% QST.

Residents of New Brunswick, Newfoundland and Nova Scotia, add 15% HST.

All other provinces, add 7% GST.

Grand Total \$ _____

No shipping and handling on instructions for quantities under 6. Add \$.50 for each instruction over 6, then add applicable shipping and handling.

Fill Out For Credit Card
 Visa Mastercard

Card Exp. Date: _____

Cardholder's Name: _____

Card Number: _____

Signature: _____

CUT ON DOTTED LINE


Can.Eng. 4358-3951B

Scenera

Convertible Car Seat

Instruction Manual

Dorel Juvenile Group

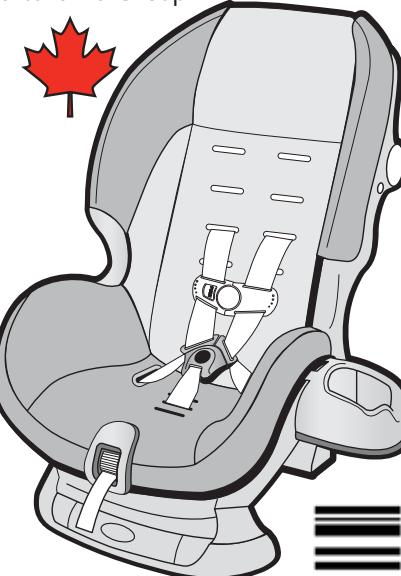

Infant Restraint
 2.3-14 kg (5-30 lb)
 48-81 cm (19-32 in.)

Child Restraint
 10-18 kg (22-40 lb)
 74-102 cm (29-40 in.)

**Read all instructions BEFORE
USING
this child restraint.**


KEEP INSTRUCTIONS FOR FUTURE USE.



IMPORTANT!

Failure to read, understand and follow the instructions and warnings in this instruction manual could result in serious injury or death to the child.

06.11.07



Before You Begin...

Thank you for choosing this car seat, referred to throughout this manual as a child restraint. Dorel Juvenile Group, (DJG) is committed to creating convenient, comfortable, and dependable products for children.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read, understand and follow the instructions and warnings.

After reading if you still have questions or concerns with the child restraint please contact our Consumer Relations Department.

On the back of the shell there is an expiry date for use of this child restraint. Do not use this seat after the expiry date.

Registration Cards

Although child restraints and booster seats are tested, evaluated and certified by the manufacturer and tested by Transport Canada, it is possible that a safety-related problem may be found. So that we may be able to advise you, you can now register your child restraint online at www.djgusa.com or please fill out and return the registration card provided or send your name, address, child restraint model number and manufacturing date to:

Dorel Distribution Canada
873 Hodge
St-Laurent, QC H4N 2B1
Attn: Consumer Relations

Please do not send in your registration card if you have registered your child restraint online.

For information on safety-related problems, you can also call Transport Canada's Road Safety Dept. at:
1-800-333-0371

Dorel Juvenile Group, Consumer Relations

Dorel Juvenile Group, Inc.

Mailing address: P.O. Box 2609
Columbus, IN 47202-2609

Website: www.djgusa.com


Email consumer@djgusa.com

Fax: 1-800-207-8182


Telephone: 1-800-544-1108
7 A.M. to 6 P.M. EST M-TH
7 A.M. to 4:30 P.M. EST FRI

I

II




Child Restraint Parts

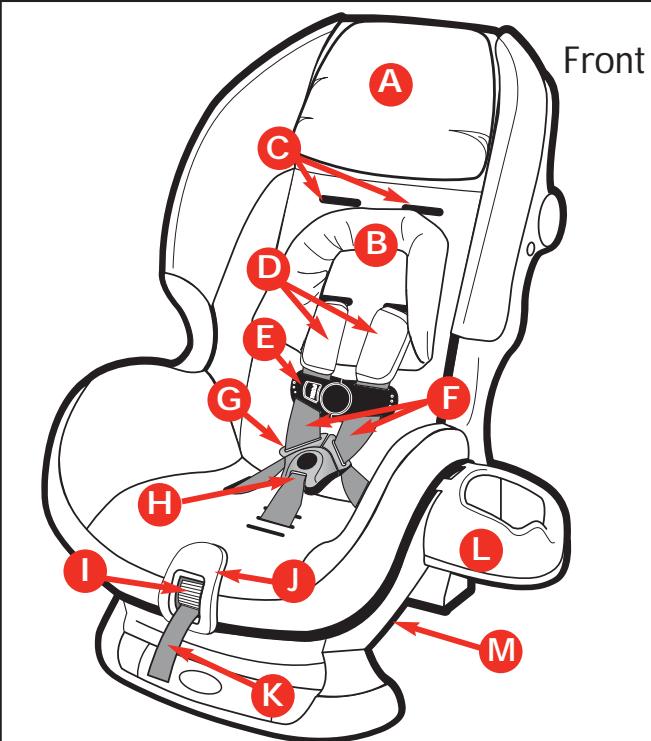

Front

A. Pillow (on select models) **H.** Buckle/Crotch Strap
B. Infant Insert (on select models) **I.** Harness Adjustment Lever
C. Harness Slots **J.** Harness Adjustment Lever Cover
D. Harness Covers (on select models) **K.** Harness Adjustment Strap
E. Chest Clip **L.** Cup Holder
F. Harness Straps **M.** Rear-Facing Belt Path
G. Buckle Plate

III

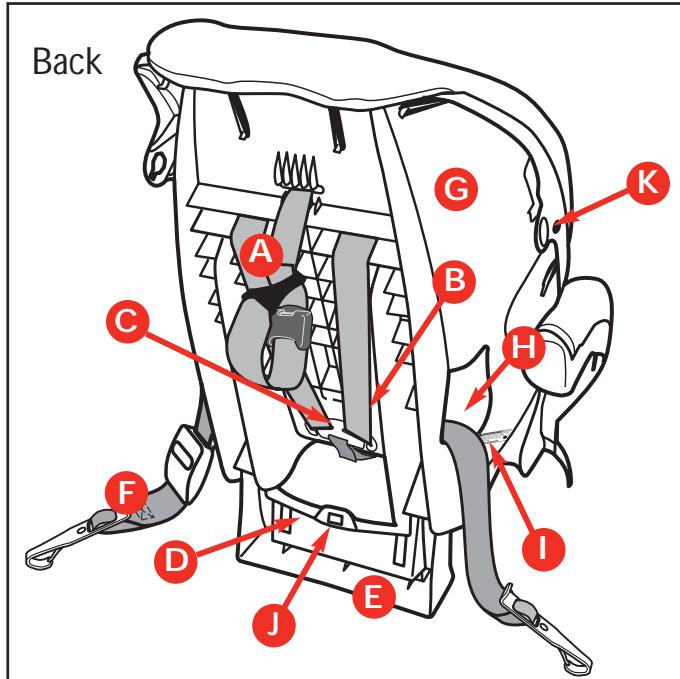

Back

A. Tether Strap, Adjuster & Hook
B. Locking Clip (behind strap)
C. Splitter Plate
D. Instruction Compartment
E. Recline Stand
F. UAS Belt & Adjuster (may be between pad and shell)
G. Plastic Shell
H. Forward-Facing Belt Path
I. Level to Ground Line
J. Tether Hook Storage Anchor
K. UAS Hook Storage Anchor

IV

Table of Contents

Warnings.....	2-5
Aircraft use	6
Transport Canada regulations.....	6
Tether strap information	6
Universal Anchorage System (UAS) information	7
Vehicle seat belt	7
Storing your child restraint	8
Child restraint description	9
Locking clip installation	10-11
Preparing child restraint to fit your child	12-13
Adjusting harness system.....	14-15
Securing your child in the child restraint.....	16-17
Removing your child from the child restraint.....	18
Reclining the child restraint.....	19
Removing Harness Covers (on select models)	19
Installing cup holder	20
Removing infant insert (on select models)	20
Removing pillow (on select models).....	20
Adjusting the tether strap	21
Rear-facing child restraint installation	
with vehicle seat belt	22-25
with UAS belt	26-29
Forward-facing child restraint installation	
with vehicle seat belt	30-32
with UAS belt	33-35
Removing seat pad for cleaning	36-38
Installing seat pad.....	39
Installing harness system	40-42
Warranty	43
Replacement part order form	46
Replacement part list	47

⚠ WARNINGS:

⚠ Failure to read, understand and follow all instructions in this manual can result in serious injury or death to the child in a sudden stop or a collision.

⚠ According to accident statistics, children are safer when properly restrained in the rear seating positions than in the front seating positions.

⚠ This child restraint can only be used on forward facing vehicle seats.

⚠ Do not use this child restraint on side or rear facing vehicle seats.

⚠ Never take your child out of the child restraint or attend to the child's needs while the vehicle is moving.

⚠ This child restraint must always face the rear of the vehicle and be in the fully reclined position when the child weighs between 2.3-14 kg (5-30 lb.) and is less than one year old.

⚠ Never place a child in front of an active frontal airbag in the rear-facing position. Death or serious injury can occur.

⚠ Check vehicle instructions for more information about airbag/child restraint use.

⚠ Never place a child less than one-year old forward facing.

⚠ DJG does not recommend the use of accessories or add-ons that have not been certified with this child restraint at original purchase date.

⚠️ WARNINGS:

- ⚠️ Although the child restraint system has gone through testing and evaluations from the manufacturer and was certified to Transport Canada's standards, the possibility of a safety related problem could occur. To be notified of a safety related problem, you must register your child restraint online at www.djgusa.com or fill out and return the registration card which is attached to the child restraint.
- ⚠️ The child restraint's harness system should always be snug. A loose harness could allow the child to come out of the restraint or be ejected during a sudden stop or a collision causing serious injury or death.
- ⚠️ Do not wash the child restraint's pad while still on the plastic shell. Spot clean only if it is not removed.
- ⚠️ Do not recline the infant restraint beyond the level-to-ground line.
- ⚠️ For vehicles with no rear seats, refer to the vehicle owner's manual for location and installation of a child restraint.
- ⚠️ Do not remove the warning labels.
- ⚠️ Never allow anyone to play with this restraint system. It is not a toy.
- ⚠️ To avoid the child being seriously burned, always check for hot seat and buckles before using this restraint system.

⚠️ WARNINGS:

- ⚠️ Never leave a child unattended in the child restraint.
- ⚠️ Do not use this child restraint if the midpoint of your child's ears is above the top of the child restraint.
- ⚠️ Always check vehicle owner's manual for proper use of vehicle seat belts with your child restraint.
- ⚠️ Always check vehicle owner's manual for child restraint use with side air bags.
- ⚠️ Incorrect use of the harness system in the child restraint is the most common mistake people make. Verify frequently that the harness height is correct for your child's size.
- ⚠️ Always check your vehicle owner's manual for child restraint use with your vehicle's universal anchorage system (UAS).
- ⚠️ Do not lubricate the buckles, harness system or fasteners for any reason.
- ⚠️ Secure the top tether strap provided with this child restraint as specified in your vehicle owner's manual and this instruction manual.
- ⚠️ This child restraint has been certified for use in passenger vehicles only. Do not use in a boat, on a motorcycle or in a cargo van or bus where there are no seat belts or tether anchors. Do not modify for use as a crib or a swing. Do not leave on stove top or any other hot surface.

⚠️ WARNINGS:

- ⚠️ In very few vehicles, the child restraint cannot be properly installed because of the type of seat belt system, airbag system and/or lack of location to anchor the tether strap. Always read and follow the vehicle owner's manual instructions for child restraint use.
- ⚠️ Do not use a child restraint if you do not know the history of the restraint.
- ⚠️ Do not use a child restraint with missing or damaged parts.
- ⚠️ Do not use a child restraint that has been in a crash or a collision. The child restraint must be replaced.
- ⚠️ When unoccupied, the child restraint must be firmly secured to the vehicle by means of a UAS or a vehicle seat belt and if the system is equipped with a tether strap by means of the tether strap. In a crash or sudden stop an unsecured child restraint could injure the driver or other occupants in the vehicle.

Aircraft Use

This child restraint is certified for aircraft use. Use only on forward-facing seats and in a position where the seat belt can be tightened securely. The installation is the same as in your vehicle. Use only with F.A.A. certified equipment. Contact the airline before taking the child restraint on an aircraft in order to comply with their regulations.

Transport Canada Regulations

Transport Canada Road Safety Directorate regulates children's restraint systems and booster seats under the Motor Vehicle Restraint Systems and Booster Cushion Safety Regulations (RSSR). The regulations require the manufacturer and/or importer to certify the child restraint to the applicable safety standards and place specified warnings and information on the labels fastened to each child restraint and in this instruction manual.

Tether Strap Information

Your vehicle owner's manual will provide you with the tether strap anchorage information and location. For older vehicles with no tether anchorage information, please contact your dealer or the vehicle manufacturer for location of anchor brackets and installation.

⚠️ WARNING

In very few vehicles, the child restraint cannot be properly installed because of the type of seat belt system, airbag system and/or lack of location to anchor the tether strap. Always read and follow the vehicle owner's manual instructions for child restraint use.

Universal Anchorage System (UAS) Information

As of September 1, 2002, Universal Anchorage Systems were required to be installed on child restraint systems. Vehicles built after this date are required to have anchor brackets/bars built into the vehicle seat. The UAS allows for easier installation of child restraint systems as the vehicle seat belt does not have to be used.

In the United States the term "LATCH" is used instead of UAS. UAS and LATCH mean the same thing.

Your vehicle owner's manual provides information on the UAS brackets installed in the vehicle. The manual also provides additional information to help you correctly install a restraint system that has UAS.

If your vehicle is not equipped with UAS, installing the child restraint with the seat belt is just as secure.

Note: UAS brackets cannot be installed in older vehicles.

Vehicle Seat Belt

A child restraint must be securely attached in a vehicle.

Most passenger vehicles, vans and trucks have seat belts that firmly lock around the child restraint system.

Some vehicle seat belts require a locking clip to attach the child restraint securely.

Your vehicle owner's manual best describes the use of a child restraint with the vehicle's seat belt.


Check the vehicle owner's manual for the correct use of your seat belt with a child restraint.

Storing Your Child Restraint

To protect your child restraint, store in the house, not in the garage or attic. The hot and cold temperatures can harm the plastic shell and/or the harness system if stored for a long period of time.


Child Restraint Description

Your child's height, weight and age determine how your child restraint should be placed in the vehicle and which restraint should be used.

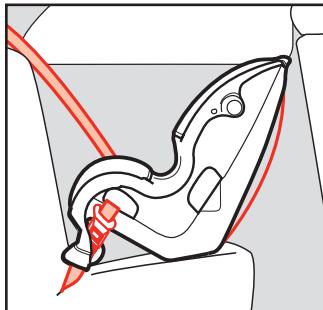

Rear-facing position;
Less than one year old and between 2.3-14 kg. (5-30 lbs.) and 48-81 cm. (19-32 inches) tall. Infant and infant restraint are placed in the back seat and face the rear of the vehicle.

NOTE: Infants one year old or less **must** be rear-facing.

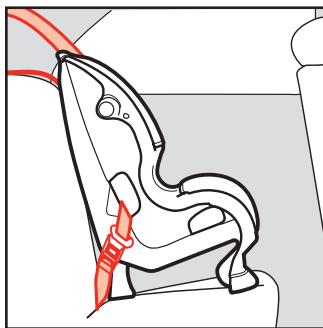

Forward-facing position;
Over one year old and between 10-18 kg. (22-40 lbs.) and 74-102 cm (29-40 inches) tall. Child and child restraint are placed in the back seat and face the front of the vehicle.

NOTE: Children **must** be 1 year old or older for forward-facing position.

⚠ WARNING

Verify your child's weight and height (do not guess) before choosing the child restraint position.


Locking Clip Installation

The locking clip is used to prevent the vehicle belt from loosening in the event of a sudden stop or crash.


Before you put your child restraint in the vehicle, buckle the lap/shoulder belt. Pull on the lap belt portion. If it loosens or slips, you must either use a locking clip to hold the seat belt tight or move child restraint to another seating location.

Note: A locking clip will not fix all types of seat belt problems.

- Check vehicle owner's manual if locking clip is needed.
- You will find the locking clip inserted on the back of the child restraint.
- A locking clip can only be used on a lap/shoulder belt combination.

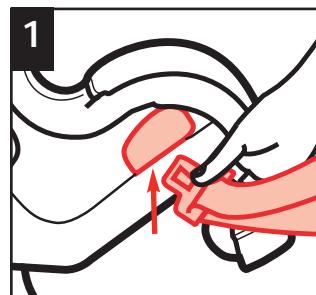


Thread the vehicle lap/shoulder belt through the correct belt path. Buckle the vehicle seat belt. Pull up on shoulder part of belt until all slack is removed and lap belt is tight.

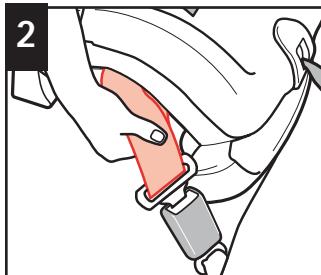


Grasp the vehicle lap/shoulder belts together tightly as close to the vehicle latch plate as possible. While holding the belts tightly, unbuckle.


Note: If the vehicle latch plate, belt and buckle end up behind the child restraint, grasp the belts as close to the latch plate as possible.

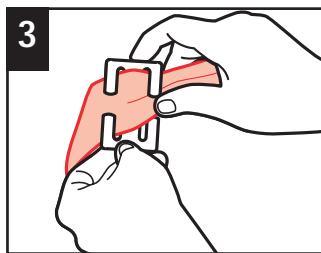

Thread both portions of the vehicle belts together onto the locking clip.

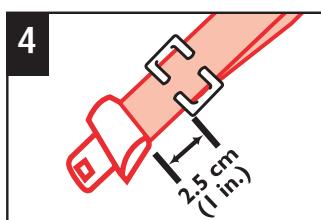


Position locking clip about 2.5 cm (1 in.) from vehicle belt's buckle plate.

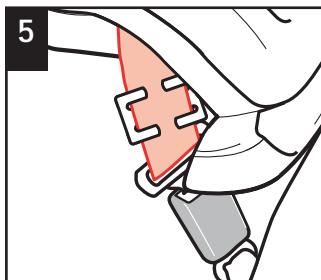


Buckle the vehicle seat belt with locking clip into the buckle. The child restraint and the vehicle belts should now be tight. If not, remove and repeat all steps. If you still have questions after installing the locking clip please contact our Consumer Relations department.

Preparing Child Restraint to Fit Your Child

You **MUST** make these adjustments with your child before you install the child restraint in the vehicle.

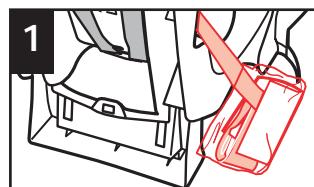


Pull UAS belt packaging (plastic bag) out from the shell.

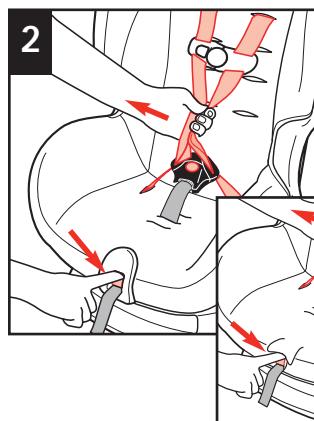


Loosen harness by pushing in on the harness adjustment lever. Pull out on harness just above buckle plates.

Depending on your model, the harness adjustment lever may be under a flap on the pad in the front of restraint.

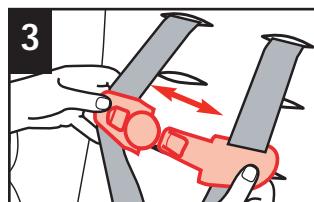

Push on chest clip release button and pull apart.

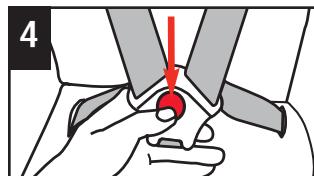

Press down on the red buckle release button to release the buckle plates. Place harness straps over sides of child restraint.




5

Place the child's bottom and back flat against the child restraint. This will increase comfort and allow the harness straps to properly tighten.

Note: Harness straps should be snug.

Check Harness Position

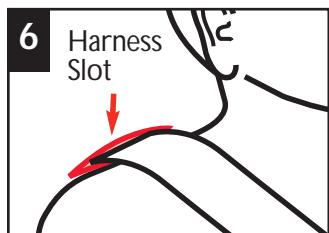

6 Harness Slot

Rear Facing Position: Harness slot must be **even with or just below** the shoulders. Make sure that child restraint is fully reclined. Adjust if needed (see "Adjusting Harness System" section).

If the lowest harness slot is above the child's shoulders, do not use this child restraint. Verify that child restraint is fully reclined. Infants have a tendency to want to slouch. If harness height is still incorrect, call Consumer Relations for more detailed help.

Forward-Facing Position:

Harness slot must be **even with or just above** the shoulders. Adjust if needed (see "Adjusting Harness System" section).


Note: If the top harness slot is below the child's shoulders, **do not** use this child restraint. Use a belt-positioning booster instead.

WARNING

Do not mistake comfort for safety. Harness system and buckle must be snugly adjusted.


Incorrect use of the harness system is the most common mistake people make. It is very important to read, understand and follow all instructions and warnings.

Adjusting Harness System

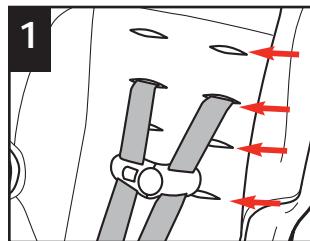

1

Determine which set of harness slots work best for your child (see "Preparing Child Restraint to Fit Your Child" section).

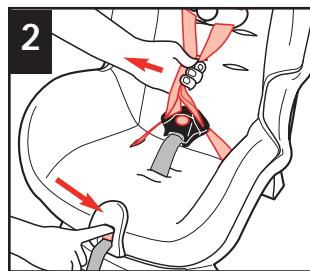

2


To change harness location:

Loosen harness by pushing down on the harness adjustment lever. Pull out on harness straps just above buckle plates.




3

From the back of the child restraint, unhook harness strap loops from splitter plate.

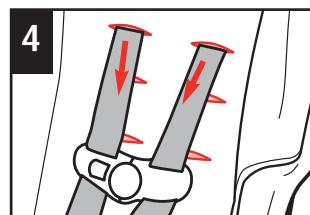

4

From the front, pull harness straps out of the harness slots.

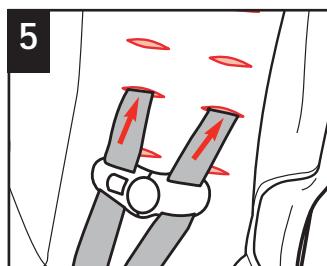


Rethread harness straps into new harness slot location.

Note: DO NOT twist harness straps.



From the back of the child restraint, refasten harness straps to splitter plate.

Note: DO NOT twist harness straps.

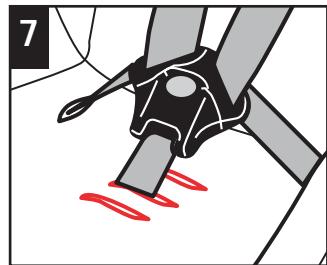

Determine which of the three buckle slots that is both comfortable and snug to use. (See "Adjusting the Buckle" section)

Note: Thread buckle and buckle strap through slot closest to child

! WARNING

Failure to reinstall the harness straps correctly could result in serious injury or death.


Do not mistake comfort for safety. Harness straps must be snugly adjusted.

Securing Your Child in the Child Restraint


Note: The style of buckle may vary, but the operation of the buckle is the same.




Place the child's bottom and back flat against the child restraint. This will increase comfort and allow the harness system to be properly tightened. Pull harness straps over child's shoulders.

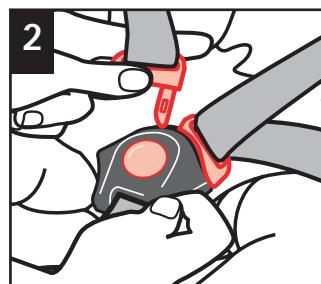

Push each buckle plate into buckle until you hear a "click". Pull up on harness straps and down on the crotch strap to make sure buckle is locked.

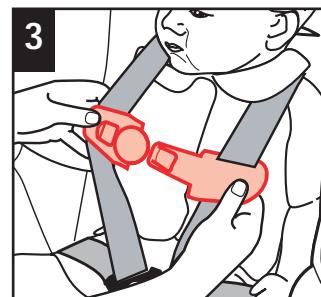

Snap the chest clip together.

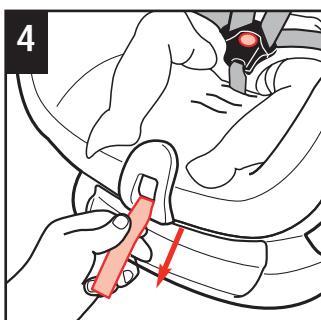

Pull on harness adjustment strap to tighten harness system snugly.

Note: A snug harness is not loose and lies flat against the child without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

!WARNING

Do not mistake comfort for safety. Harness straps must be snugly adjusted.



Note: To position the chest clip, move it up or down so that it is even with your child's armpits, away from the child's neck.

!WARNING


Failure to fasten and tighten the harness system correctly may allow the child to be ejected from the child restraint system in a crash or sudden stop causing serious injury or death.

Removing Your Child From the Child Restraint




Loosen harness by pushing down on the harness adjustment lever. Pull out on harness straps just above buckle plates.

Depending on your model, the harness adjustment lever may be under a flap on the pad in the front of restraint.

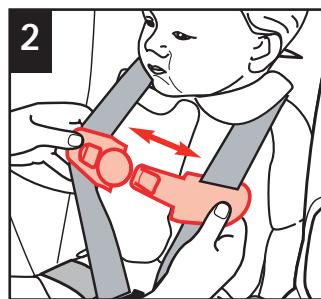


Press the release button on the chest clip and pull apart.

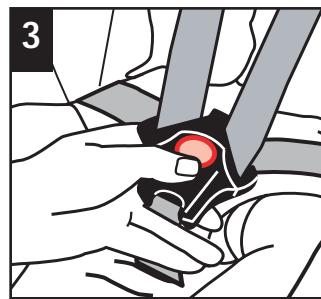

Press down on the red buckle release button to unlock. Remove child.


Reclining the Child Restraint

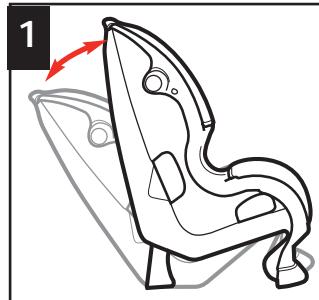

This child restraint has 2 recline positions: Upright (forward-facing only) and Reclined.

Rear-facing - Must be fully reclined.


Forward-Facing - Reclined or upright.

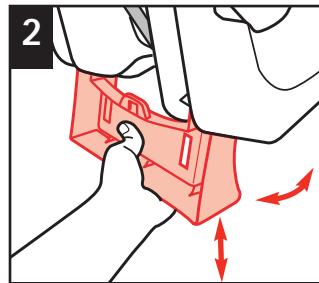

For reclined position, pull down to unlock recline stand and fold under seat.


For upright position, pull recline stand out from under seat and push up to lock in place.

Removing Harness Covers on Select Models

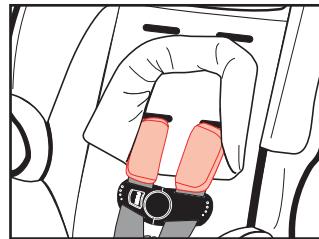


The harness covers help to provide comfort to the infant's neck. For harness covers to fit correctly you may have to push the ends of the covers through the harness slots. To remove the harness covers you will have to unthread the harness system (see "Adjusting Harness System" section), remove harness covers and rethread harness straps to splitter plate (see "Adjusting Harness System" section).

Installing Cup Holder

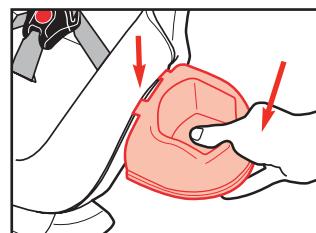


Cup holder can be on either side. Hook cup holder on side of shell. Push down firmly on cup holder until the bottom snaps onto side of shell.

Removing Infant Insert (on select models)

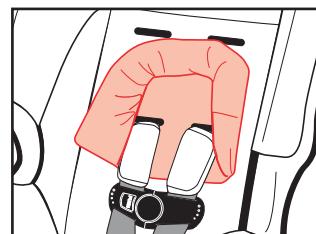

The infant insert is designed to support the infant's head and neck. Make sure that the insert does not cover the infant's face in any way. Remove the insert when the infant's head has reached the top inside part of the infant insert. To remove the infant insert, you will have to unthread the harness system, (see "Removing Seat Pad for Cleaning" section), and remove the insert. Rethread harness system. (see "Installing Harness" section)


Removing Pillow (on select models)

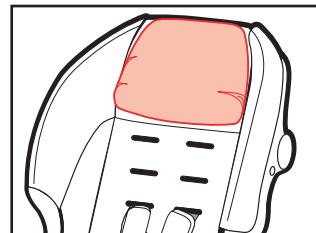


The pillow provides extra comfort for your toddler. To remove pillow, pull apart fastening strips and remove pillow. To replace, pull top fastening straps over top of shell and attach to top of pad.

Adjusting the Tether Strap


Vehicles manufactured today already have the tether anchor hardware installed in the vehicle. Refer to your owner's manual for locations. For older vehicles contact your dealer or the manufacturer for locations and hardware installation.

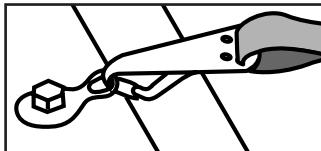


Fasten child restraint tether hook to tether anchor in vehicle.

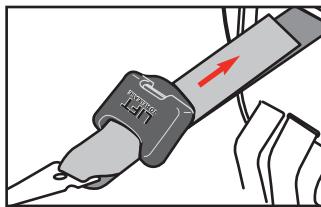

Tighten tether strap by pulling on loose end of tether strap.

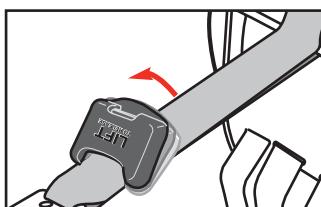

Loosen tether strap by lifting up on tether adjuster.

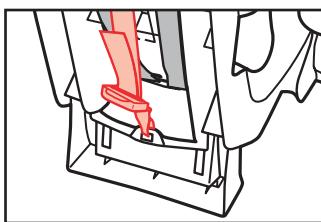


Storing tether strap:
When tether is not in use, fasten tether hook to recline stand's tether hook storage anchor as shown.


WARNING

A loose tether strap and tether hook can result in serious injuries.

Rear-Facing Child Restraint Installation with Vehicle Seat Belt:

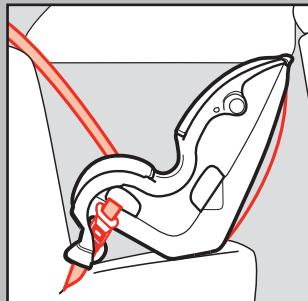

Lap/Shoulder Belt

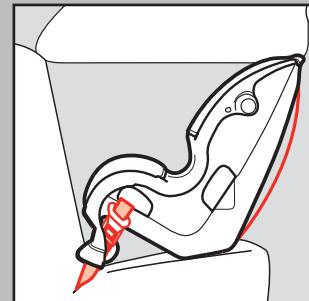

Lap Belt

Note: Fasten tether hook to recline stand's tether hook storage anchor.


- Check vehicle owner's manual for seat belt use with a child restraint.
- Do not use universal anchorage system (UAS) when using the vehicle seat belt.

WARNING


Fasten the UAS belt hooks on side of shell when not in use. A loose UAS system could cause injury or death.

Never place a child in front of an active frontal airbag in the rear-facing position. Death or serious injury can occur.

For vehicles with an air bag, but without a back seat, refer to your vehicle owner's manual.

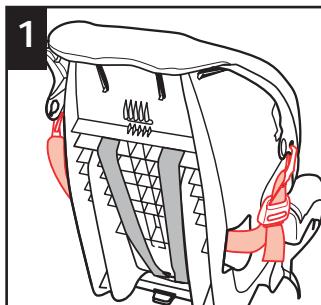

When UAS is not in use, fasten the UAS hooks on the sides of the shell as shown.


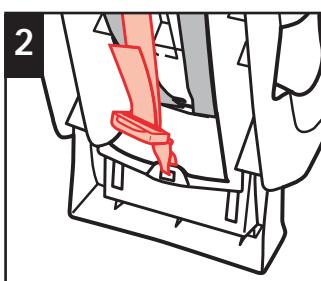


Do Not Use the tether strap in the rear-facing position. Fasten tether hook to recline stand's tether hook storage anchor. Fold in recline stand for reclined position (see "Reclining the Child Restraint" section).




Place child restraint rear facing in the back seat in the **fully reclined position**. Make sure the level lines on the side of shell are level to ground.

Note: If vehicle seat has a downward slope, causing the child's head to fall forward, you may use a tightly rolled towel or a foam noodle under the child restraint where the vehicle's bench back meets the vehicle's bench seat.

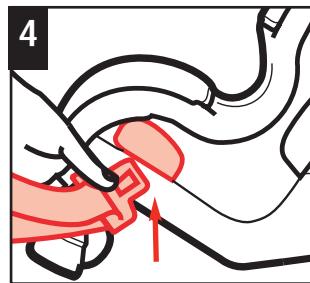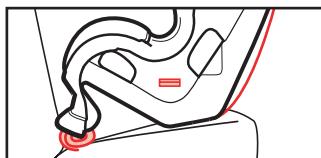


Thread the vehicle lap or lap/shoulder belt through the rear-facing belt path.

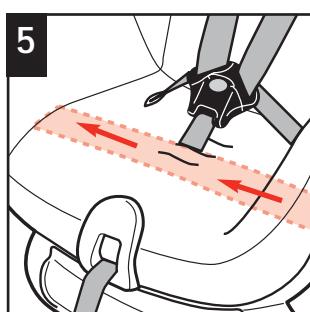


Thread vehicle seat belt **under** pad in front of the crotch strap, to the opposite side. Buckle vehicle belt.

Note: DO NOT PLACE VEHICLE BELT over the child's legs.

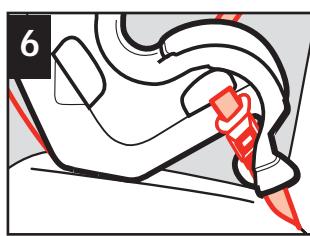


Note: Make sure vehicle buckle and belt are between shell and side of child restraint as shown.

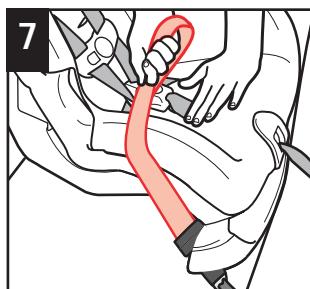

Push down firmly on the seat of the child restraint and pull up on shoulder belt to tighten.

⚠ WARNING

Do not recline the infant restraint beyond the level to ground line.

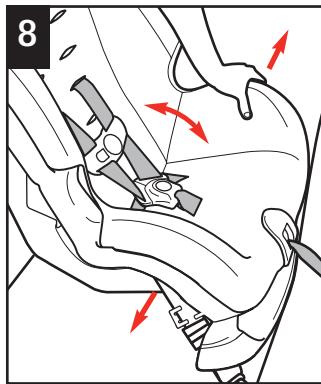

With one hand at belt path, push and pull the child restraint from side to side, forward and back. If the vehicle belt does not loosen, the child restraint should be secure.


If vehicle belt loosens, repeat all steps. Check seat belt use in your vehicle owner's manual and review the "Locking Clip Installation" section or call DJG Consumer Relations for help.

! WARNING

Use of this child restraint in any vehicle where the lap or lap/shoulder belt cannot be tightened securely can result in serious injury or death to the child.

25

Rear-Facing Child Restraint Installation with UAS Belt

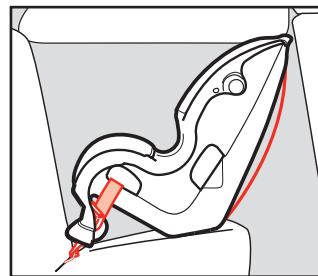



UAS Belt

Note: Fasten tether hook to recline stand's tether hook storage anchor.

- Check vehicle owner's manual for UAS belt use with a child restraint.
- Do not use the vehicle seat belt when using the universal anchorage system (UAS).

! WARNING

Never place a child in front of an active frontal airbag in the rear-facing position. Death or serious injury can occur.

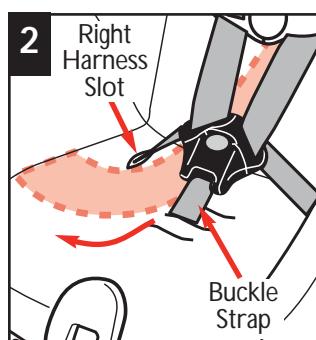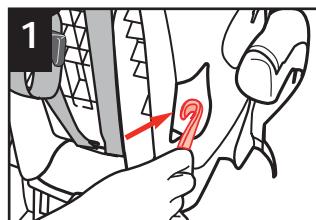


To thread the UAS belt, put belt end with hook and adjuster through the forward-facing belt path.

Reach under pad, pulling UAS hook and adjuster between right harness slot and buckle strap and out the rear-facing belt path slot.


26

continued on next page.


Rear Facing Child Restraint Installation with UAS Belt: 2.3-14 kg (5-30 lbs.), 48-81 cm (19-32 in.)

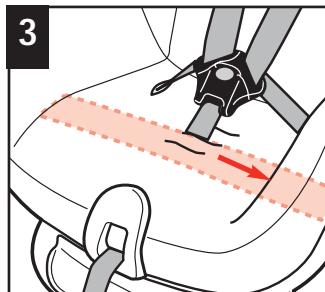


Reach under seat pad and pull the other end of UAS hook through the other rear-facing belt path slot. Make sure UAS belt goes in front of the crotch strap buckle as shown.

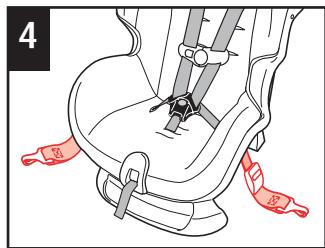

Completed threading of UAS rear-facing is shown.
DO NOT twist belt.

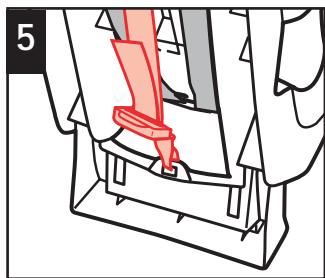


Do Not Use the tether strap in the rear-facing position. Fasten tether hook to recline stand. Fold in recline stand for reclined position (see "Reclining the Child Restraint" section).

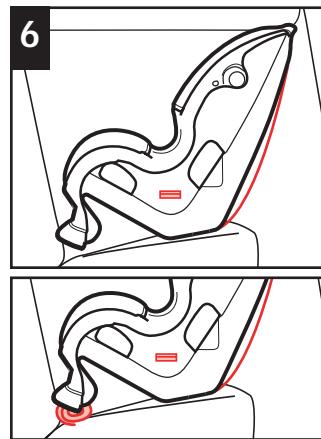

Place child restraint rear-facing in the back seat in the **fully reclined position**. Make sure the level lines on side of shell are level to ground. **Note:** If vehicle seat has a downward slope, causing the child's head to fall forward, you may use a tightly rolled towel or a foam noodle under the restraint's base where the vehicle's bench back meets the vehicle's bench seat.

WARNING

Do not recline the infant restraint beyond the level-to-ground line.

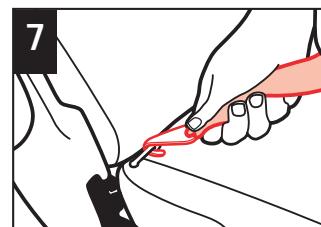


Fasten one UAS hook on each anchor bracket/bar located on each side of the child restraint. See your vehicle owner's manual for locations.


WARNING

Do not fasten both UAS hooks on the same UAS anchor bracket/bar in the vehicle.


Do not use UAS belt with the vehicle seat belt.

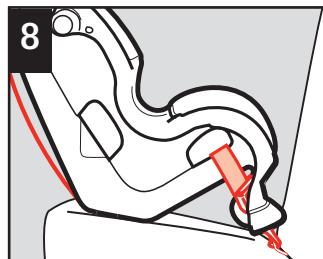


Note: Make sure UAS buckle and belt are between shell and side of seat as shown.

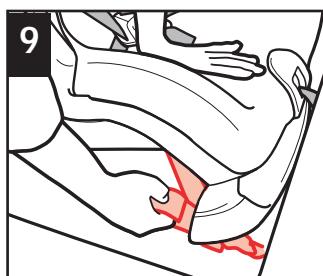

Push down firmly on the child restraint seat and pull up on loose end of belt to tighten.

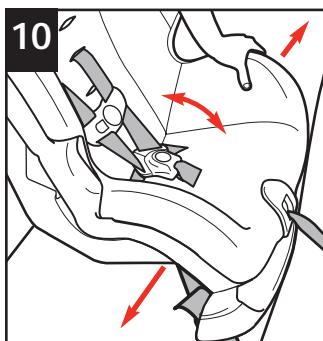

With one hand at belt path, push and pull the child restraint from side to side, forward and back. If the UAS belt does not loosen, the child restraint should be secure. If belt loosens, repeat all steps. Check your vehicle owner's manual or call DJG Consumer Relations for help.

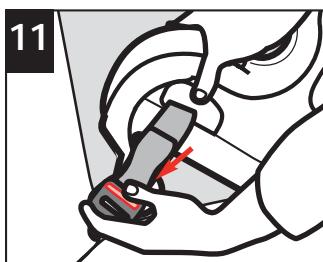


To release the UAS belt, push down on UAS belt adjuster button to loosen belt. Unhook UAS from bar.


Forward-Facing Child Restraint Installation with Vehicle Seat Belts:

Note: Do not use universal anchorage system (UAS) when using the vehicle seat belt.

- Check vehicle owner's manual for seat belt use with a child restraint.

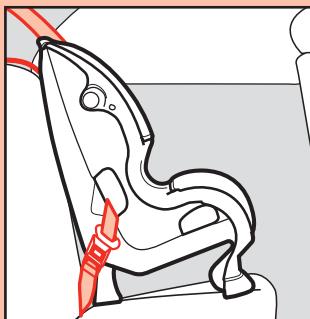

Lap/Shoulder Belt

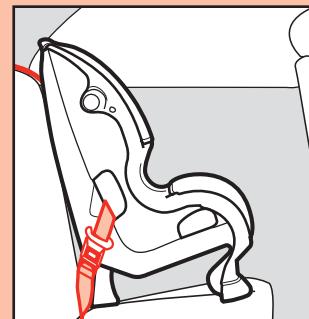


Lap Belt


WARNING

Fasten the UAS belt hooks to side of shell when not in use. A loose UAS system could cause injury or death.

For vehicles with an air bag, but without a back seat, refer to your vehicle owner's manual.

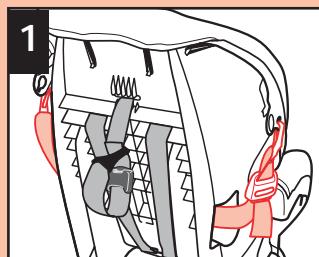


When UAS is not in use, fasten the UAS hooks on the sides of the shell as shown.

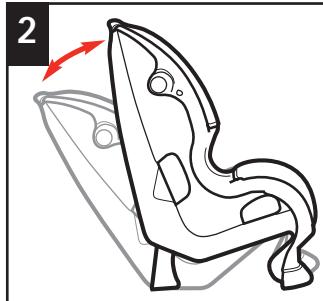


This child restraint can be used in 2 positions: upright and reclined (see "Reclining the Child restraint" section).

The recline position is to be used only to install the child restraint flush against the back of the vehicle seat back, if needed.

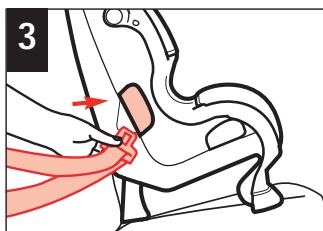


Place child restraint flush against the back of the vehicle seat **forward-facing** in the back seat.

Thread vehicle belt through the forward-facing belt path. Buckle.

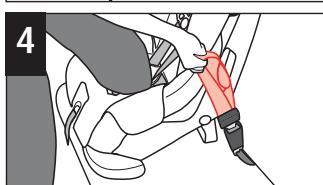


Place one knee in the child restraint and push down while pulling on vehicle belt to tighten.

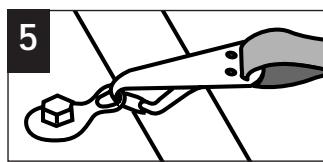

Fasten tether hook to the tether anchor in your vehicle and pull on loose end to tighten. (See "Adjusting the Tether Strap" section.)

⚠ WARNING

Tether straps are required in Canada. Using this child restraint without the tether strap anchored as recommended by the manufacturer would be a misuse of the child restraint and in a sudden stop or crash could cause serious injury or death.

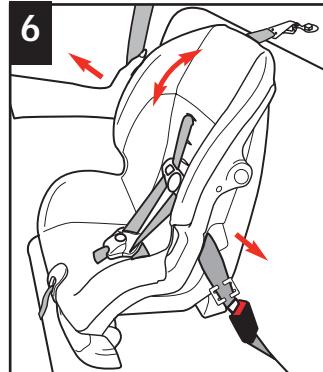


With one hand at belt path, push and pull the child restraint from side to side, forward and back. If vehicle belt does not loosen, the child restraint should be secure.

If vehicle belt loosens, repeat all steps. Check seat belt use in your vehicle owner's manual and review the "Locking Clip Installation" section or call DJG Consumer Relations for help.

⚠ WARNING

Use of this child restraint in any vehicle where the lap or lap/shoulder belt cannot be tightened securely could cause serious injury or death to the child.

Forward-Facing Child Restraint Installation with UAS Belt

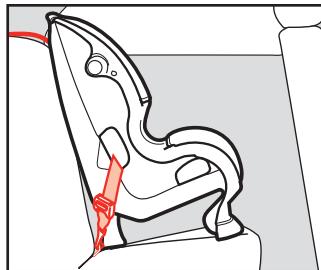


UAS Belt

Note: If you were using the UAS belt for a rear facing installation, it must be removed from the rear facing belt path before you begin (see "Rear-Facing Child Restraint Installation with UAS Belt" section).


- Do not use the vehicle seat belt when using the universal anchorage system (UAS).
- Check vehicle owner's manual for seat belt use with a child restraint.

⚠ WARNING

For vehicles with an air bag, but without a back seat, refer to your vehicle owner's manual.

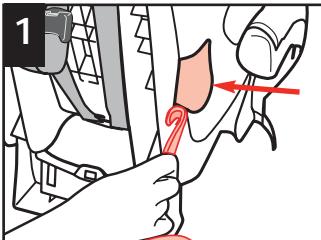


Insert UAS belt through the forward-facing belt path, pulling the hook across the back of shell and out the other side.

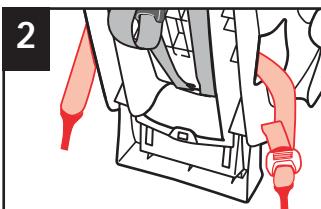

Completed threading of UAS forward-facing is shown. **DO NOT** twist belt.


33

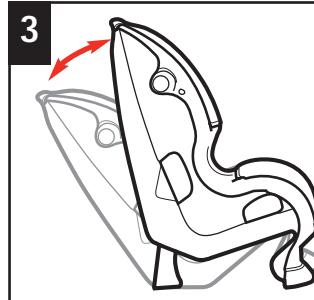

3

This child restraint can be used in 2 positions: upright and reclined (see "Reclining the Child restraint" section).

The recline position is to be used only to install the child restraint flush against the back of the vehicle seat back, if needed.

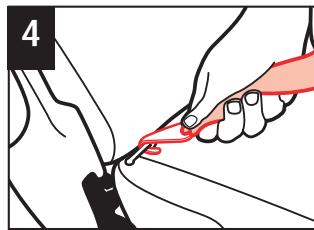


4

Place child restraint flush against the back of the vehicle seat **forward-facing** in the back seat. Fasten one UAS hook on each anchor bracket/bar located on each side of the child restraint. See your vehicle owner's manual for locations.

⚠ WARNING

Do not fasten both UAS hooks on the same UAS anchor bracket/bar in the vehicle.

Do not use UAS belt with the vehicle seat belt.

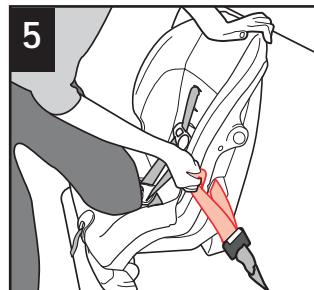


5

Place one knee in the child restraint and push down while pulling on the loose end of UAS belt to tighten.

34

continued on next page.

Forward-Facing Child Restraint Installation with UAS Belt: 10-18 kg (22-40 lb.), 74-102 cm (29-40 in.)

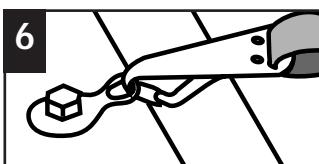


6

Fasten tether hook to the tether anchor in your vehicle and pull on loose end to tighten.

⚠️ WARNING

Tether straps are required in Canada. Using this child restraint without the tether strap anchored as recommended by the manufacturer would be a misuse of the child restraint and in a sudden stop or crash could cause serious injury or death.

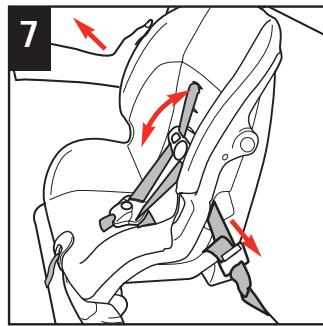


7

With one hand at belt path, push and pull the child restraint from side to side, forward and back. If the UAS belt does not loosen, the child restraint should be secure. If belt loosens, repeat all steps. Check your vehicle owner's manual or call DJG Consumer Relations for help.

⚠️ WARNING

UAS belt must be securely fastened. A loose UAS system could cause serious injury or death to the child.

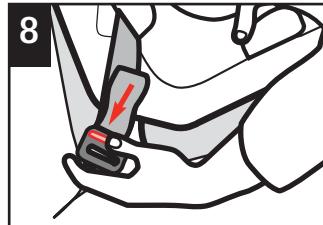

8

To release the UAS belt push down on UAS belt adjuster button to loosen belt. Unhook UAS from bar.

Removing Seat Pad for Cleaning


NOTE: Pad: Hand wash with warm sudsy water, rinse clean and air dry. Do not use bleach or other harsh cleaners. Do not dry clean.

Harness Straps: Spot clean only. Do not machine wash or hand wash.

⚠️ WARNING

Do not wash the seat pad while still on the plastic shell. Spot clean only if it is not removed.

Do not use this child restraint without the seat pad. Failure to do this can result in serious injury.

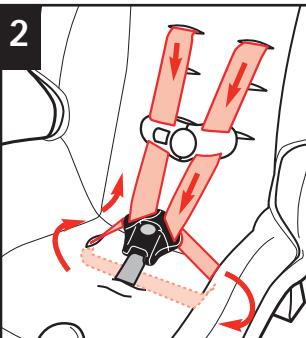


To Remove Harness:
From the back of the child restraint, unhook harness strap loops from splitter plate.

From the front, pull harness straps out of the upper harness slots.

Remove chest clip from harness straps.

Remove harness straps from buckle plates.


Holding one harness strap, pull harness completely out of lower harness slots.

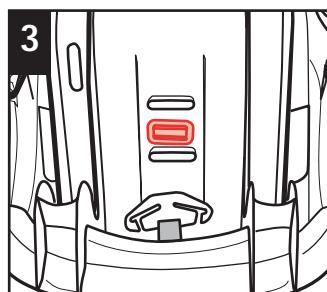


From the bottom of seat of child restraint locate the buckle's metal plate.




Insert buckle's metal plate up through slot in the shell and pad.

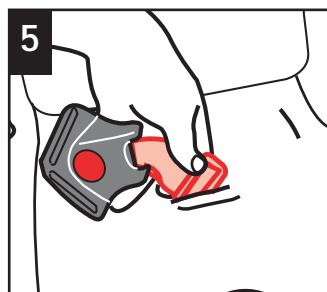


From the front, pull buckle free from shell and pad.

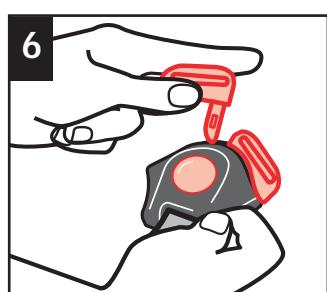

Lock buckle plates into buckle. Set aside harness system to reinstall after cleaning.

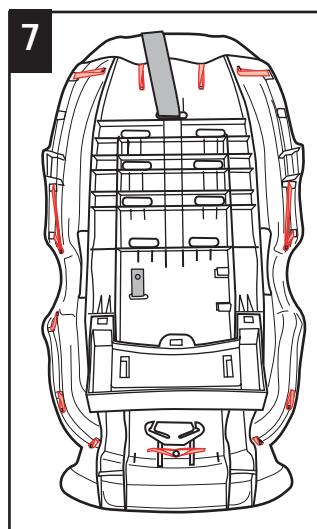


To Remove Pad:
From the back of shell, release the elastic straps shown in red

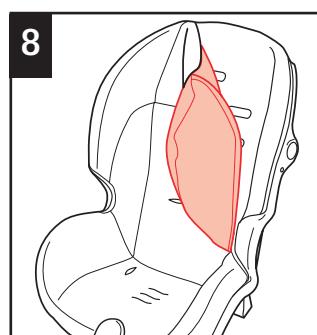


From the front of child restraint, remove pad from shell, starting at the top, then the sides.

Installing Seat Pad

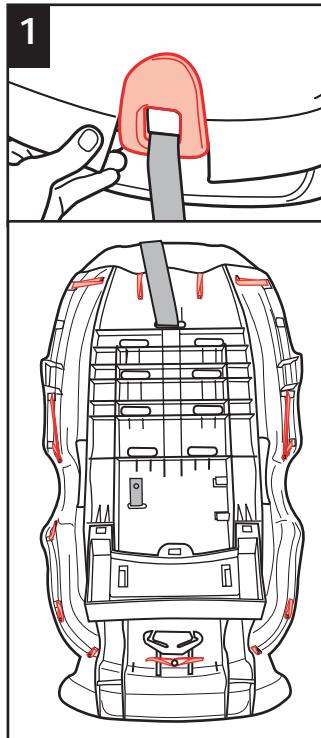


Replace seat pad by reversing order (see "Removing Seat Pad for Cleaning" section). Start by laying pad in shell and tuck in pad around harness adjuster lever cover. Make sure holes in foam pad align with harness slot holes before wrapping pad over top of shell. Hook the elastic straps at top of seat. Turn seat over and thread all elastic straps into the holes and connect them to the posts. Install Harness (see "Installing Harness" section).


Install Harness System

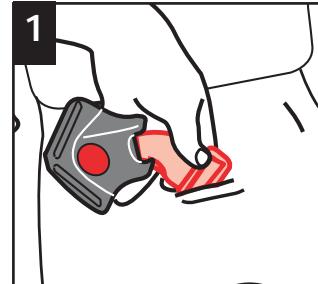

From the front of child restraint, push buckle's metal plate through pad and shell. Make sure that buckle is **facing out**.

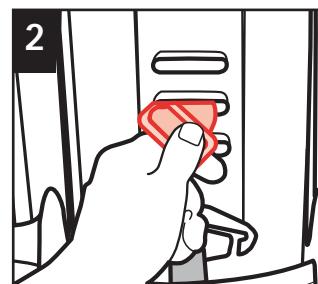


From underneath child restraint, pull buckle's metal plate through the pad and shell.

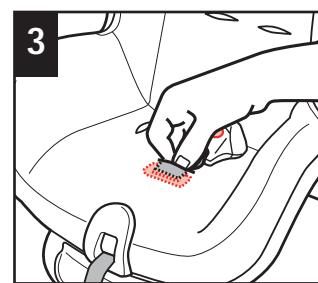

Pull up on buckle/crotch strap to make sure buckle's metal plate is completely inserted through the pad and shell.

WARNING

Failure to place buckle's metal plate completely through pad and shell can result in serious injury or death to the child.

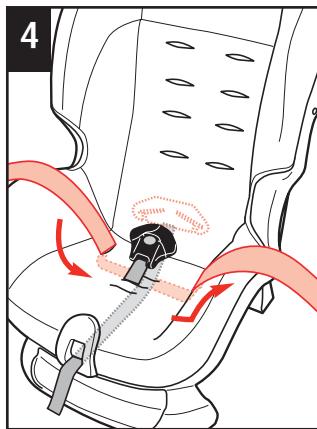


4
Push one harness end through lower harness slot on the **left side** of child restraint.


Thread harness strap under seat of child restraint. Be sure harness adjustment strap is **between** shell and harness strap.

Push end of harness strap up through lower harness slot on the **right side** of child restraint.

Note: DO NOT twist harness straps.

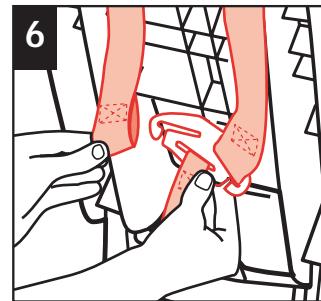

6
Fit harness strap loops onto splitter plate in the back of child restraint.

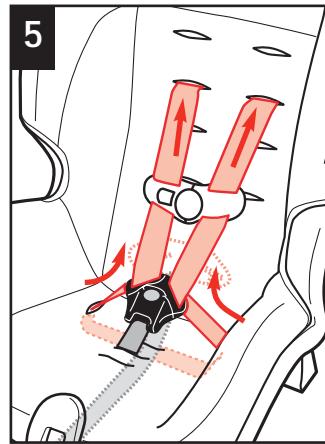

5
Thread left harness strap through left buckle plate and right harness strap through right buckle plate. Make sure to push through from the **back** of buckle plate.


Thread harness ends through chest clip.

Push left harness strap through left harness slot and right harness strap through right harness slot at the same height.

Note: DO NOT twist harness straps.

WARNING

Failure to install the harness system properly can result in serious injury or death to the child.



Warranty

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:
This product is warranted against defective materials or workmanship for **one year** from the date of original purchase.
An original receipt is required to validate your warranty. DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may contact us at www.djgusa.com, fax us at 1-800-207-8182 24 hours a day, write to DJG, Consumer Relations Department, P.O. Box 2609, Columbus, IN 47202-2609, or call 1-800-544-1108 from 7:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 7:00 a.m. to 4:30 p.m. on Friday. **Proof of purchase is required and shipping charges are the responsibility of the consumer.**

Warranty Limitations:

This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages:

The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, express or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

PLEASE REGISTER ON LINE AT WWW.DJGUSA.COM OR
COMPLETE AND MAIL THE PRE-PAID OWNER
REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE
TO EXPEDITE WARRANTY CLAIMS AND TO VERIFY
THE ORIGINAL DATE OF PURCHASE.

Replacement Part Order Form

For replacement parts, complete this form below. We must have your model number and manufacture date codes on the form to ensure proper replacement parts. They can be found on the stickers on the side of the child restraint shell. Payment in U.S. dollars must accompany your order. Choose parts needed from the list supplied.

Mail form and payment to:

Dorel Juvenile Group, Inc.
Consumer Relations Department
P. O. Box 2609
Columbus, IN 47202-2609

Fax to: 1-800-207-8182
Website: www.djgusa.com

Please make money order payable to Dorel Juvenile Group, Inc. See next page for Visa or MasterCard payment. We do not accept personal checks or Discover Card. For orders outside of Canada and the U.S. we accept Visa or MasterCard only.

We **MUST** have this information to process your order:

Model Number: _____
Manufacture Date (y/m/d): _____

Ship to (please print) _____

Name _____

Address _____

City _____

Province _____

Postal code _____ Country _____

Telephone (area code) _____

E-mail address _____